

LED DL 840 PCd-M12-57

Art. Nr. 1-000000-07439

Ktl. Nr. 15071089

EAN Nr. 4260654164787



Normen / Norms

DIN EN 60598-1 :2021/A11:2022	DIN EN 60529 :1991/A2:2013/AC:2019-02
DIN EN 55015:2019+A11:2020	DIN EN IEC 63000:2018
DIN EN 61547:2009	
DIN EN 62471:2009	




Elektrische Rahmenbedingungen / Electrical characteristic

Netzanschluss / Main Supply	24 VDC
Leistung / Power (W R G B)	20,3W 6,5W 2,7W 7,1W
Dimmbar / Dimmable	PWM
Anschluss / Connection Type	M12, 5-Pol, A-Cod.
Durchschleifbar / Loophthrough	Nein / No
Pinbelegung / Pin assignment	


Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5700 K
Lichtstrom(Brutto) / Lum. Flux(Gross)(W R G B)	3303lm 177lm 303lm 126lm
Lichtstrom(Netto) / Lum. Flux(Net)(W R G B)	1476lm 149lm 60lm 86lm
Effizienz(Brutto) / Efficiency(Gross)(W)	163lm/W
Effizienz(Netto) / Efficiency(Net)(W)	73lm/W
Abstrahlwinkel / Beam Angle	90°
Farbtreue / Colour Rendering	RA / CRI > 80
Photobiological Safety	RG-1

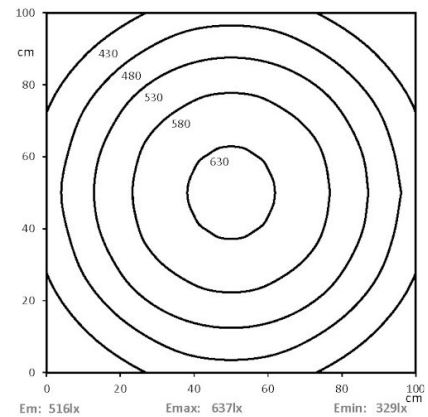

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PC, Diff.
Drehbar / Rotatable	Nein / No
Gewicht(Netto) / Weight(Net)	0,44 kg
Betriebstemperatur / Operating Temp.	-20°C / +45°C
Lebensdauer / Lifetime	min. 60000 h
Befestigung / Fastening	-

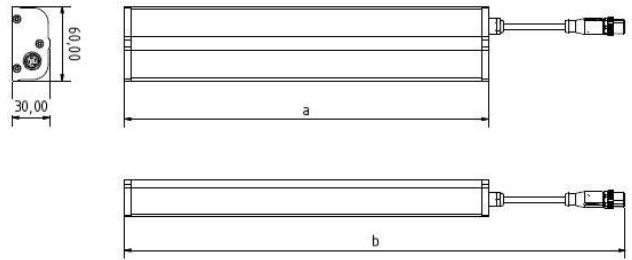

a = 855mm b = 855mm

*Technische Änderungen vorbehalten | technical modifications reserved