

LED APLN 400 PMMA_p-GST18-57

Art. Nr. 1-000000-07061

Ktl. Nr. 15071031

EAN Nr. 4260654164732

Normen / Norms

DIN EN IEC 60598-1 DIN EN 12464-1


DIN EN IEC 55015

DIN EN 61547

DIN EN 62471




Elektrische Rahmenbedingungen / Electrical characteristic

Netzanschluss / Main Supply	230 VAC
Leistung / Power	16,1 W
Dimmbar / Dimmable	int. steppless
Anschluss / Connection Type	Einbaubuchse, GST18, 3-Pol, -
Kaskadierbar / Cascadable	Ja
Polbild	


Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5700 K
Lichtstrom / Luminous Flux	2282 lm
Effizienz / Efficiency	142 lm/W
Abstrahlwinkel / Beam Angle	100°
Farbtreue / Colour Rendering	RA / CRI >80
Photobiological Safety	RG-1

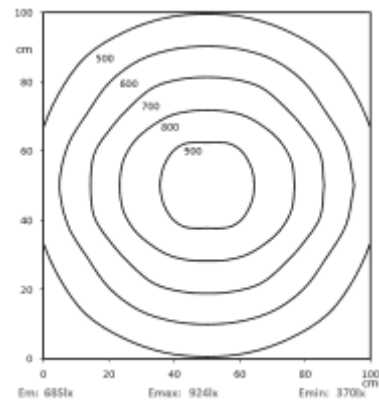

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Prisma
Befestigung / Fastening	Starr
Gewicht(Netto) / Weight(Net)	1,49 kg
Betriebstemperatur / Operating Temp.	-20°C / +40°C
Lebensdauer / Lifetime	min. 60000 h
Zubehör / Equipment	-

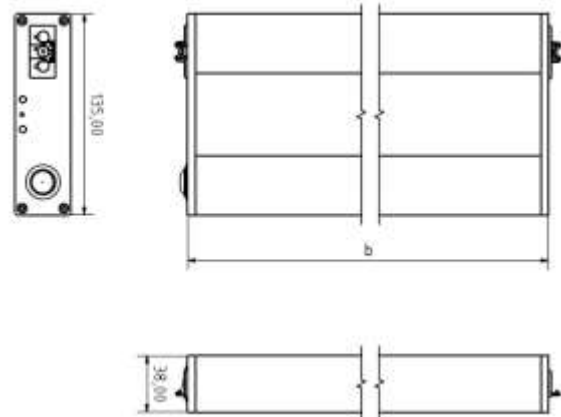

b= 416mm

*Technische Änderungen vorbehalten | technical modifications reserved