

LED SL-RGBW 420 S-PMMA_d-M8d-57

Art. Nr. 1-000000-07647

Ktl. Nr. 15071145

EAN Nr. 4260654165432



Normen / Norms

DIN EN IEC 60598-1

DIN EN IEC 55015

DIN EN 61547

DIN EN 62471



Elektrische Rahmenbedingungen / Electrical characteristic


Netzanschluss / Main Supply	24 VDC
Leistung / Power (W/R/G/B)	12,9W / 6W / 5,9W / 5,8W
Dimmbar / Dimmable	extern PWM
Anschluss / Connection Type	Flansch, M8, 5-Pol, B-Codiert
Kaskadierbar / Cascadable	Ja
Polbild	

Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5000 K
Lichtstrom / Luminous Flux (W/R/G/B)	918lm / 130lm / 329lm / 72lm
Effizienz / Efficiency	47 lm/W
Abstrahlwinkel / Beam Angle	100°
Farbtreue / Colour Rendering	RA / CRI 80
Photobiological Safety	RG-1

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diffus
Befestigung / Fastening	Starr
Gewicht(Netto) / Weight(Net)	0,33 kg
Betriebstemperatur / Operating Temp.	-20°C / +45°C
Lebensdauer / Lifetime	min. 60000 h
Zubehör / Equipment	-

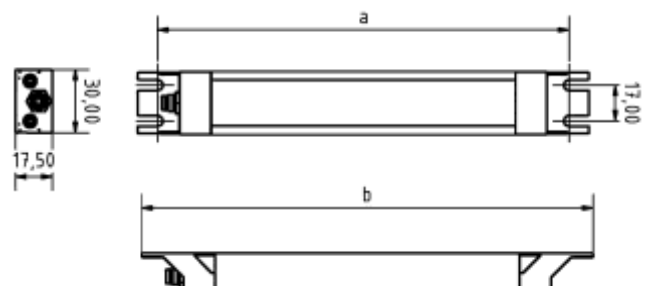

a = 483mm b = 495mm

*Technische Änderungen vorbehalten | technical modifications reserved